再循环部材用的双面胶带

DAITAC #8800DR

构成

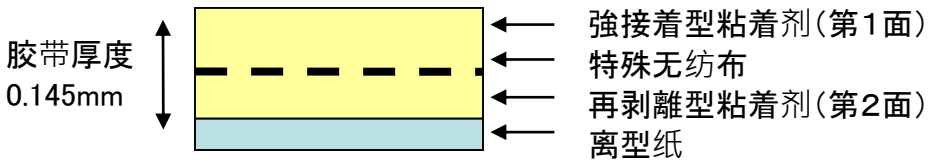

特征

・聚氨酯泡棉等粘着性良好的強粘着型粘着剂和，随时间推移粘着力上升缓慢的再剥离型粘着剂的组合、形成的两面粘着力不同的双面胶带。

・使用了纵横的强度差较少的坚韧无纺布，重工（重复贴合）性、拆解・分别作业性良好。

用途

・聚氨酯泡棉和金属等，和单面的再循环使用部材的粘着固定

・粘着面积大的再循环使用部材的粘着固定

物性

		单位	#8800DR	
			第一粘着面	第二粘着面
接着力	SUS	N/20mm	15．2	10．0
	ABS		17．0	10．0
耐湿後接着力	SUS	N/20mm	23．0	14．0
	ABS		21．0	13．0
再剥離性	SUS			○：糊残り無し
60℃・90%RH	ABS			○：糊残り無し
7日後	HIPS			○：糊残り無し
	PC／ABS			○：糊残り無し

规格

最大宽幅：１０６０mm　标准长度：５０m

本资料是根据敝司内部试验以及可靠的数据组成，作为给贵司的一个参考实例。我们希望各位在充分考虑之后使用我司产品。本资料的产品使用在标签，贴纸类，部材的固定，以及其他的应用时，不保证是否和第三方的工业产权（残业财产权）相抵触，还请知悉。请勿在未经敝司许可的情况下，擅自复制或转载本资料的部分或者全部内容。本资料的内容若有更改会直接实行，恕不另行告知。

Items mentioned in this information are for customers ' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents , it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.