


超强粘着无纺布基材双面胶带 / Excellent Adhesion non-woven Based Double Coated Adhesive Tape

DAITAC #8840ERS-200

构成 / Construction

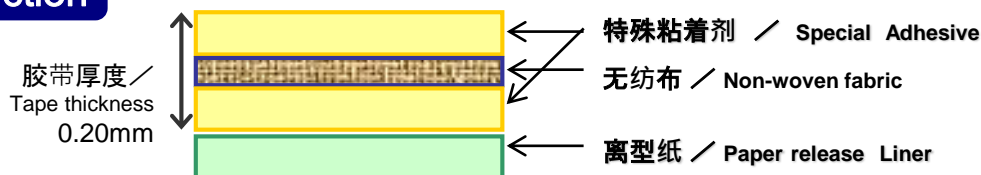

特征 / Characteristics

- ◆ 具有良好的强粘着性、耐剥离性。 / Excellent adhesion and repulsion resistance
- ◆ 和金属、PP、PS、玻璃等难粘着材料也有良好的粘着性。
/ Excellent adhesion to Metal, polyolefin plastic, and glass.

用途 / Applications

- ◆ 所有工业用部材的粘着固定 / For bonding a variety of materials for industry.

粘着物性 / Properties

		单位 Unit	#8840ERS-200
胶带厚度 Tape thickness		[mm]	0.20
接着力 Peel strength (Conform to JIS Z0237)	SUS(hairline)	[N/20mm]	34.0
	ABS		35.4
	PC/ABS		32.0
	PP		32.3
	PPE/PS		32.0
	HIPS		32.0
	glass		31.1
剪切接着力 shear strength (Conform to JIS Z0237)	SUS(hairline)	[N/4cm ²]	465
	ABS		453
	PC/ABS		348
	PP		365
	PPE/PS		493
	HIPS		480
	glass		422
保持力 Holding power (Conform to JIS Z0237)	40°C 500g/4cm ²	[hour]	24<

规格 / Size

最大宽幅 1060mm 标准长度50m
Maximum width is 1060mm. Standard length is 50m.